




The SLE series – An incredibly slim cassette profile step for a range of vehicles.

The SLE range is one of our most popular and versatile series of electric side access steps for taxis, accessibility vehicles, ambulances, and many other special purpose vehicles. With an incredibly slim cassette profile of just 46mm, the SLE is the ideal step for low ground clearance vehicles.

Dimensions

Tread width	W1	450mm
Cassette width	W2	531mm
Tread Depth (Deployed)	D1	236mm
Cassette Depth (Stowed)	D2	422mm
Cassette Depth with Tread (Deployed)	D3	658mm
Tread height	H1	31mm
Cassette height	H2	46mm

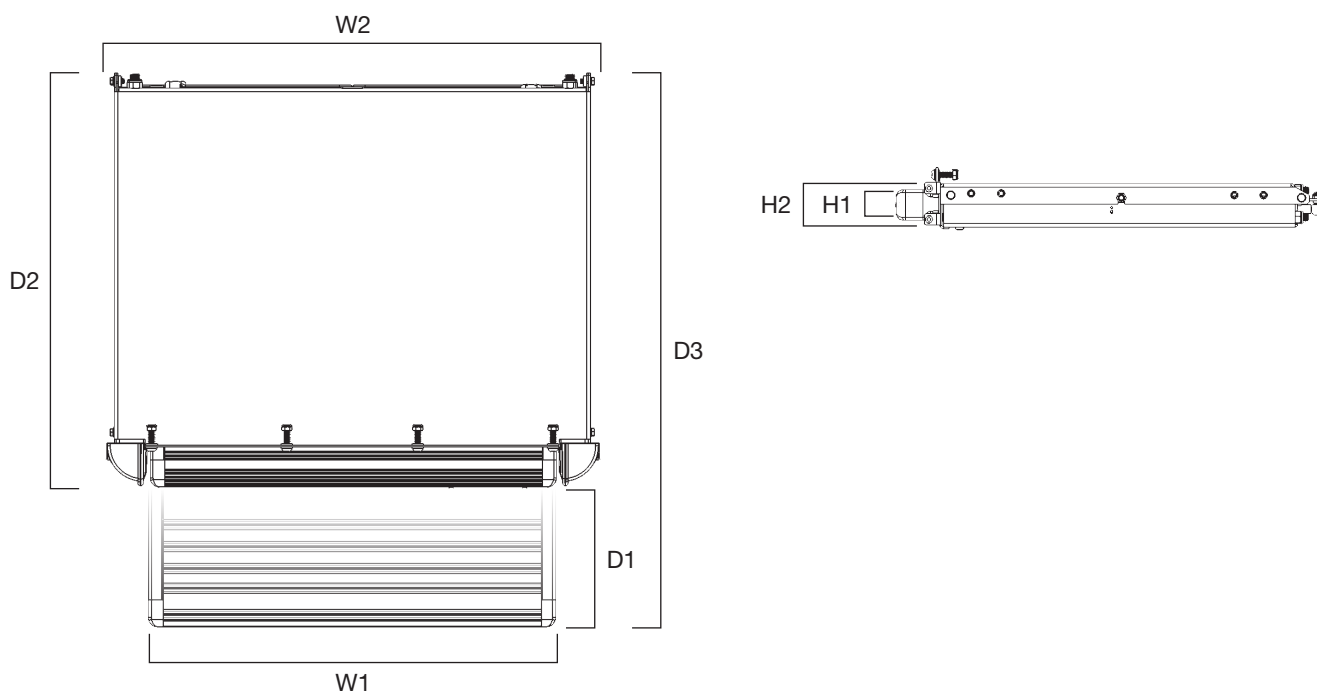


Weight and Safe Working Load

Weight	14kg
Safe working load	150kg

Features

Typically, the step will be set up to deploy automatically when the door is opened and retract when the door is closed, although they can also be solely driver operated. The fully automatic control can be switched off in the stowed or deployed position via an isolation switch on the dashboard. A red light on the dashboard will flash to let the driver know when the step is not stowed, as a failsafe the step can be wired to stow when the handbrake is released.

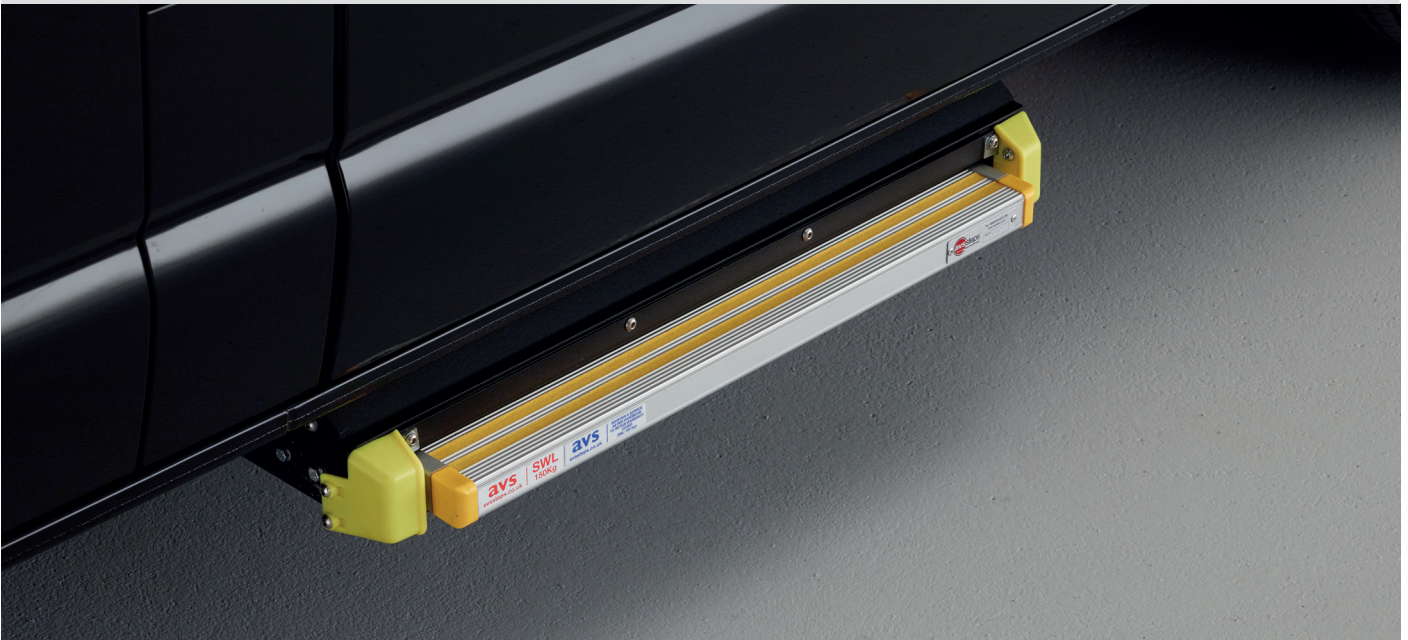

- Powered by a purpose made high torque motor
- Extremely water resistant
- Self-cleaning side arm action that prevents dirt accumulating at the back of the step
- An isolation switch that allows the step to be turned off in the stowed or deployed position
- Fitting kit available for all popular vehicles

Options

- LED warning light – on dashboard
- Full automatic or driver controlled operation

Technical Information

Voltage	12 nom
Current amps	3A
Lead	One lead for the dashboard (3.5m) and one for step (4.5m)

Tools Required

2 x Person	1 x 10mm, 11mm, 13mm Spanner
1 x 4mm Allen Key	1 x 7mm, 9mm Drill bit
1 x Drill	

Materials

Cassette	Galvanised Steel
Tread	Aluminium
Running Gear	Nylon and Stainless Steel